


P40U-I, P40U-IP, P40U-IW

P40U-I Complements Premier IQ Series and Builder ITB Series Models

- Compact low input factory assembled heater for commercial / industrial applications

P40U-IP & P40U-IW round out the outdoor and harsh environment models IWP & IW

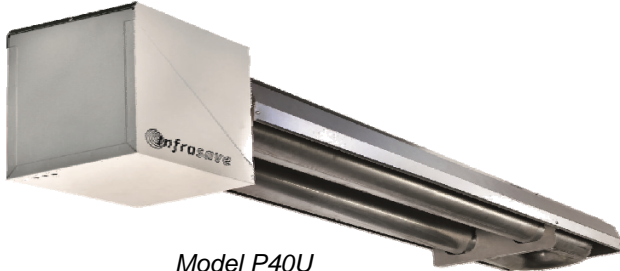

Model P40U

Compact 10 ft total length design
 Factory assembled burner to tube
 Installs directly from carton

For outdoor use:

- P40U-IP Powder Coated Housing
- P40U-IW Stainless Steel Housing

BURNER: 40,000 Btuh Natural Gas (optional conversion kit for LPG), Flexible Gas Connector, 120V 3-Pronged Plug, 4" dia. Combustion Air Collar.

P40U-IP: Powder Coated Weather Resistant Housing for outdoor use

P40U-IW: Stainless Steel Weather Resistant Housing for harsh environments

TUBE / REFLECTOR SYSTEM: Corrosion resistant aluminized steel construction, 4 inch diameter U-tube provides 17 ft of heat exchange tube in compact 10 ft length; includes 4 ft Lion Chain and four safety snap hooks.

COMPLETE SYSTEMS:

| MODEL | CAPACITY | FUEL | TOTAL LENGTH | Burner Cabinet | PART # |
|---------|-------------|------|--------------|-----------------------------------|------------|
| P40U-IP | 40,000 Btuh | NG | 10'-3" | Powder Coated weather resistant | PU-PJ40-AN |
| P40U-IW | 40,000 Btuh | NG | 10'-3" | Stainless Steel weather resistant | PU-WJ40-AN |

Burners are stocked in natural gas only - Field conversion kit required for LP - see below

FIELD CONVERSION KIT FOR P40U-I (-IP, -IW) SERIES BURNERS

| INPUT | Field Conversion Kit | PART # |
|-------------|-------------------------------|------------|
| 40,000 Btuh | Field Conversion Kit NG to LP | JS-0555-XA |
| | LP to NG | JS-0555-XB |

OPTIONAL ACCESSORIES: 4" Horizontal Wall Flue Terminal

PART # JA-0528-XX

P40U-I DIMENSIONED VIEW

Note that models P40U-IP and P40U-IW are 10'-3" (123") in total length due to the longer length of the weather resistant burner housing.

